


## Threaded sleeve connector B-1000 A4

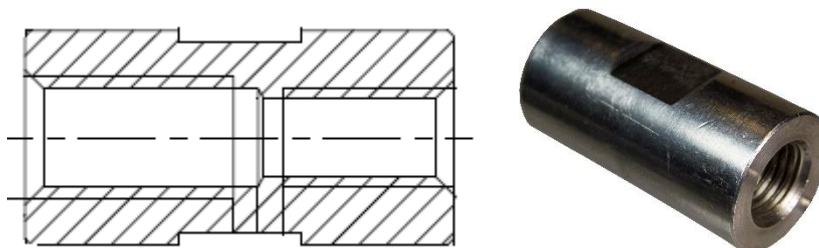

Transition sleeve for connection of stainless-steel threaded rods of dimension M16/M20 and M16/M24. Bar is equipped with key grip 30mm.

### Stock program:

M16/M20x70 B1000 Ø35 A4 / 1.4404

M16/M24x80 B1000 Ø35 A4 / 1.4404

M20/M24x85 B1000 Ø35 A4 / 1.4404

Other dimensions available on request

### Technical information:

Stainless steel: 1.4404/1.4432 or equivalent according to NS EN 10088-1. Duplex steel (1.4462) available upon request. Minimum yield strength prior to machining: Rp1.0 320 MPa.

| Thread  | Outer diameter (mm) | Length(mm) | Weight | Thread engagement (mm) | Min. tensile strength (kN) |
|---------|---------------------|------------|--------|------------------------|----------------------------|
| M16/M20 | 35                  | 70         | 0,39   | 28/34                  | 125                        |
| M16/M24 | 35                  | 80         | 0,47   | 30/40                  | 125                        |
| M20/M24 | 35                  | 85         | 0,40   | 35/ 40                 | 192                        |

3.1 certificate upon request.

### Accessories:

Nut: DIN 934

Washer: DIN 125 / ISO 7089

Threaded Rod: ISO 3506-1 grade A4-80