


## Clay bit

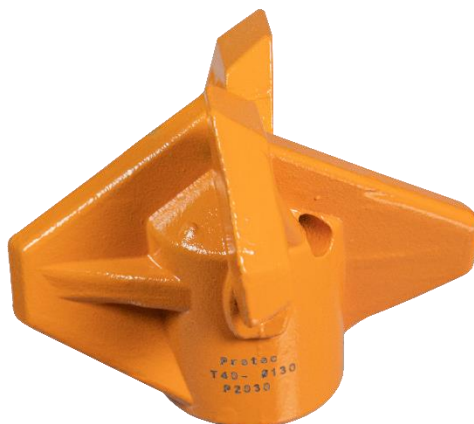

Single use clay bits for clay and soft soil. For use with self drilling anchor (SDA). Not recommended for drilling through mountain rocks and stone ground.

### Stock programme:

Clay bit R32/Ø76  
Clay bit R38/Ø110  
Clay bit R38/Ø150  
Clay bit T40/Ø130  
Clay bit T40/Ø175  
Clay bit R51/Ø130

### Technical information:

Left hand threaded acc. ISO 10208 / ISO 1720. (T40, Pretec T thread). Wet painted for corrosion protection during transport and storage.

| Clay bit | Dimension<br>(height / diameter) | Weight (kg/pc) |
|----------|----------------------------------|----------------|
| R32x76   | 82/76                            | 0,7            |
| R38x110  | 100x110                          | 1,1            |
| R38x150  | 140x150                          | 2,4            |
| T40x130  | 100/130                          | 1,2            |
| T40x175  | 116/175                          | 1,7            |
| R51x130  | 105x110                          | 2,0            |

### Accessories

Self-drilling anchor.