

Environmental product declaration

In accordance with ISO 14025 and EN15804+A2

NC bolt M20 with spherical plate Pc-Coat®



The Norwegian EPD Foundation

Owner of the declaration:

Pretec Norge AS

Product:

NC bolt M20 with spherical plate Pc-Coat®

Declared unit:

1 kg

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR

NPCR 013:2021 Part B for Steel and aluminium construction products

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-8851-8509

Registration number:

NEPD-8851-8509

Issue date:

29.01.2025

Valid to:

29.01.2030

EPD software:

LCAno EPD generator ID: 608592

General information

Product

NC bolt M20 with spherical plate Pc-Coat[®]

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-8851-8509

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
NPCR 013:2021 Part B for Steel and aluminium construction products

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 kg NC bolt M20 with spherical plate Pc-Coat[®]

Declared unit with option:

A1-A3,A4,A5,C1,C2,C3,C4,D

Functional unit:

1 kg of NC bolt M20x4000 including expansion shell and spherical plate.

NB! For other lengths see variants table at the end of the document.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Alexander Borg, Asplan Viak AS

(no signature required)

Owner of the declaration:

Pretec Norge AS
Contact person: Ernad Sarajlija
Phone: (+47) 69 10 24 60
e-mail: post@pretec.no

Manufacturer:

Pretec Norge AS
Kampenesmosen 3
1739 Borgenhaugen, Norway

Place of production:

Pretec China
Zhejiang Pretec Metal Products Co., Ltd. Nr.9, Jinchang Rd, Haining
Zhejiang Province, P.R.; China

Management system:

ISO 14001, ISO 9001 and ISO45001, AAA Certification AB, sert no 794 - EN 1090-1, AAA Certification AB, sert no 2296

Organisation no:

NO 980 429 245 MVA

Issue date:

29.01.2025

Valid to:

29.01.2030

Year of study:

2024

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools NEPDT038, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: Christine B.-Norén

Reviewer of company-specific input data and EPD: Ernad Sarajlija

Approved:



Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

A NC-Bolt is a combination bolt that is installed for immediate support of rock in tunnels or slopes. It is immediately anchored when installed by an expansion shell providing work safety and can be fully grouted at a later stage, allowing it to be classified as permanent support. NC-Bolt with PC-coat provides market leading service life in the most demanding environments.

Product specification

The NC-bolt is a rebar-based combination bolt made from scrap/recycled steel material. It has a grouting system made of a steel head and a special designed plastic tube to ensure perfect grouting and full anchoring capacity. All steel parts except the expansion shell (it has only a temporarily function) has Pc-Coat® as the standard corrosion protection. Pc-Coat® is a duplex coating system providing the optimal corrosion protection to ensure long service life in all conditions. Pc-Coat™ is suitable for use in all atmospheric corrosion classes, included CX, according to EN ISO 12944-2:2017.

This EPD is based on complete bolt with all accessories and spherical plate.

Materials	kg	%
Plastic - Polypropylene (PP)	0,04	3,99
Powder coating	0,01	0,60
Metal - Steel	0,93	92,92
Metal - Zinc	0,03	2,49
Total	1,00	100,00

Packaging	kg	%
Packaging - Pallet	0,02	93,75
Packaging - Plastic	0,00	6,25
Total incl. packaging	1,02	100,00

Technical data:

- Bolt material: High-ductility rebar B500NC acc. NS 3576-1:2024
- Thread length: 2xM20x150mm (cold rolled thread).
- Mechanical properties: Tension area 245/314 mm² (thread/stem), Yield Strength: (ReH) 500 N/mm², Tensile Strength: (Rm) 600 N/mm², Ductility: AGT min 8 %
- Corrosion protection: Pc-Coat®: Hot-dip galvanizing acc. ISO 1461 + Zinc-manganese phosphating + Powder coating according to EN 13438. Tested and approved for all corrosion classes, included CX, according to EN ISO 12944-2:2017.
- CE-marked acc. EN 1090

Market:

worldwide

Reference service life, product

120 years

Reference service life, building or construction works

LCA: Calculation rules

Declared unit:

1 kg NC bolt M20 with spherical plate Pc-Coat®

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Materials	Source	Data quality	Year
Metal - Steel	ecoinvent 3.6	Database	2019
Metal - Steel	Modified ecoinvent 3.6	Database	2019
Metal - Zinc	ecoinvent 3.6	Database	2019
Plastic - Polypropylene (PP)	ecoinvent 3.6	Database	2019
Packaging - Pallet	Modified ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Powder coating	Ecoinvent 3.6	Database	2019

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage								End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use		De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7		C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND		X	X	X	X	X

System boundary:

This EPD is a "cradle-to-gate with options" EPD. The system boundary for this LCA report is from A1 to A5, C1-C4 and D

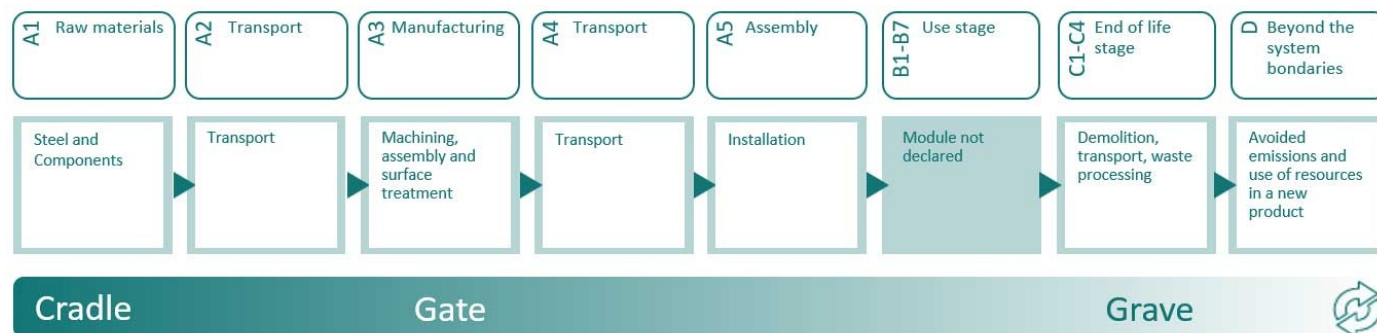

Additional technical information:

Bolts are delivered with pre-assembled expansion shells and packages are suited for stacking to optimize logistics.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Module C "End of life stage" is a generic scenario for decommissioning of construction. Subject to project specific conditions. Grade of recycling for different

steel grades is based on statistics obtained from Norsk Stålforbund.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 6 (km)	36,7 %	300	0,043	l/tkm	12,90
Assembly (A5)	Unit	Value			
Diesel, burned (L)	L/DU	0,00010			
Waste, wood, average treatment - A5, inkl. transp. (kg)	kg/DU	0,010			
Waste, packaging, pallet, EUR wooden pallet, reusable, average treatment (kg) - A5, inkl. 85 km transp.	kg	0,015			
Waste, packaging, plastic film (LDPE), to average treatment (kg) - A5, inkl. 85 km transp.	kg	0,0010			
De-construction demolition (C1)	Unit	Value			
Diesel, burned (MJ)	MJ/DU	0,62			
Waste processing (C3)	Unit	Value			
Waste treatment per kg Hazardous waste, incineration (kg) - C3	kg	0,0060			
Materials to recycling (kg)	kg	0,84			
Waste treatment per kg Polypropylene (PP), incineration with fly ash extraction (kg) - C3	kg	0,040			
Disposal (C4)	Unit	Value			
Landfilling of ashes from incineration of Hazardous waste, from incineration (kg) - C4	kg	0,0011			
Waste, scrap steel, to landfill (kg)	kg	0,10			
Landfilling of ashes from incineration of Polypropylene (PP), process per kg ashes and residues (kg) - CH - C4	kg	0,0011			
Benefits and loads beyond the system boundaries (D)	Unit	Value			
Substitution of electricity, in Norway (MJ)	MJ	0,065			
Substitution of thermal energy, district heating, in Norway (MJ)	MJ	0,98			
Substitution of Zinc (kg)	kg	0,021			
Substitution of primary steel with net scrap (kg)	kg	-0,036			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact										
Indicator		Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	GWP-total	kg CO ₂ -eq	1,08E+00	4,90E-02	2,35E-02	5,73E-02	4,90E-02	1,15E-01	1,03E-03	-3,05E-02
	GWP-fossil	kg CO ₂ -eq	1,10E+00	4,90E-02	7,22E-04	5,73E-02	4,90E-02	1,15E-01	1,03E-03	-2,95E-02
	GWP-biogenic	kg CO ₂ -eq	-1,99E-02	2,03E-05	2,27E-02	1,07E-05	2,03E-05	3,42E-05	6,27E-07	-6,10E-04
	GWP-luluc	kg CO ₂ -eq	1,82E-03	1,74E-05	1,08E-07	4,52E-06	1,74E-05	3,49E-06	1,49E-07	-3,93E-04
	ODP	kg CFC11 -eq	7,77E-08	1,11E-08	1,27E-10	1,24E-08	1,11E-08	1,60E-09	2,57E-10	-4,16E-04
	AP	mol H+ -eq	6,21E-03	1,41E-04	6,12E-06	6,00E-04	1,41E-04	3,24E-05	5,75E-06	-4,80E-04
	EP-FreshWater	kg P -eq	5,26E-05	3,92E-07	4,92E-09	2,09E-07	3,92E-07	3,28E-07	9,17E-09	-5,39E-06
	EP-Marine	kg N -eq	1,31E-03	2,79E-05	2,72E-06	2,65E-04	2,79E-05	1,02E-05	2,03E-06	-1,14E-04
	EP-Terrestrial	mol N -eq	1,37E-02	3,12E-04	2,89E-05	2,90E-03	3,12E-04	1,12E-04	2,25E-05	-1,32E-03
	POCP	kg NMVOC -eq	5,14E-03	1,19E-04	7,79E-06	7,98E-04	1,19E-04	2,87E-05	6,42E-06	-2,39E-04
	ADP-minerals&metals ¹	kg Sb-eq	1,96E-03	1,35E-06	5,66E-09	8,80E-08	1,35E-06	5,02E-08	5,31E-09	-1,65E-03
	ADP-fossil ¹	MJ	1,54E+01	7,41E-01	8,59E-03	7,89E-01	7,41E-01	6,27E-02	1,79E-02	-6,91E-01
	WDP ¹	m ³	1,50E+01	7,17E-01	7,42E-03	1,68E-01	7,17E-01	2,23E-01	9,71E-02	-5,50E+00

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

Change -47,07% compared to 2022

Additional environmental impact indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
 PM	Disease incidence	1,19E-07	3,00E-09	1,28E-10	1,59E-08	3,00E-09	3,60E-10	1,06E-10	-2,03E-09
 IRP ²	kgBq U235 -eq	3,63E-02	3,24E-03	3,46E-05	3,38E-03	3,24E-03	2,66E-04	8,08E-05	-7,67E-03
 ETP-fw ¹	CTUe	3,22E+01	5,49E-01	6,84E-03	4,31E-01	5,49E-01	2,91E-01	1,53E-02	-1,54E+00
 HTP-c ¹	CTUh	1,02E-08	0,00E+00	0,00E+00	1,70E-11	0,00E+00	1,50E-11	0,00E+00	-1,83E-10
 HTP-nc ¹	CTUh	2,93E-07	6,00E-10	2,20E-11	3,96E-10	6,00E-10	1,65E-10	1,90E-11	-1,53E-08
 SQP ¹	dimensionless	5,03E+00	5,18E-01	3,09E-03	1,00E-01	5,18E-01	2,29E-02	6,29E-02	-9,62E-01

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use										
Indicator		Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	PERE	MJ	7,18E+00	1,06E-02	1,04E-04	4,27E-03	1,06E-02	1,03E-02	5,50E-04	-6,04E-01
	PERM	MJ	2,08E-01	0,00E+00	-2,08E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PERT	MJ	7,39E+00	1,06E-02	-2,08E-01	4,27E-03	1,06E-02	1,03E-02	5,50E-04	-6,04E-01
	PENRE	MJ	1,40E+01	7,41E-01	8,59E-03	7,89E-01	7,41E-01	6,27E-02	1,79E-02	-6,93E-01
	PENRM	MJ	1,35E+00	0,00E+00	-4,25E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PENRT	MJ	1,54E+01	7,41E-01	-3,39E-02	7,89E-01	7,41E-01	6,27E-02	1,79E-02	-6,93E-01
	SM	kg	8,63E-01	0,00E+00	1,60E-06	3,87E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	1,53E-02	3,79E-04	2,90E-06	1,05E-04	3,79E-04	2,28E-04	1,08E-05	-5,00E-03
	NRSF	MJ	2,62E-01	1,36E-03	3,33E-05	1,54E-03	1,36E-03	0,00E+00	2,08E-04	-7,55E-02
	FW	m ³	1,64E-02	7,92E-05	2,90E-06	4,06E-05	7,92E-05	7,07E-05	2,25E-05	-2,54E-03

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

*Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

*INA Indicator Not Assessed

End of life - Waste

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
 HWD	kg	5,10E-03	3,82E-05	1,03E-04	2,32E-05	3,82E-05	0,00E+00	1,01E-03	-6,73E-04
 NHWD	kg	2,89E-01	3,60E-02	1,92E-03	9,34E-04	3,60E-02	6,00E-03	1,10E-01	5,25E-03
 RWD	kg	3,50E-05	5,05E-06	5,10E-08	5,48E-06	5,05E-06	0,00E+00	3,53E-09	-5,48E-06

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = $9,0 \times 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
 CRU	kg	0,00E+00	0,00E+00	1,43E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
 MFR	kg	1,94E-02	0,00E+00	5,15E-04	3,80E-04	0,00E+00	8,48E-01	0,00E+00	0,00E+00
 MER	kg	2,04E-05	0,00E+00	7,44E-04	1,18E-06	0,00E+00	4,60E-02	0,00E+00	0,00E+00
 EEE	MJ	1,46E-04	0,00E+00	7,47E-03	4,04E-06	0,00E+00	6,51E-02	0,00E+00	0,00E+00
 EET	MJ	2,21E-03	0,00E+00	1,13E-01	6,12E-05	0,00E+00	9,85E-01	0,00E+00	0,00E+00

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = $9,0 \times 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content

Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in accompanying packaging	kg C	6,20E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO ₂ -eq	1,10E+00	4,90E-02	4,53E-04	5,67E-02	4,90E-02	1,15E-01	1,03E-03	-1,05E-02

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Variants and Options

Key environmental indicators (A1-A3) for variants of this EPD

Variants	Weight (kg)	GWPTotal (kg CO ₂ -eq)	Total energy consumption (MJ)	Amount of recycled materials (%)
NC bolt M20x2400 with spherical plate, Pc-Coat®	1,00	1,17	22,14	81,73
NC bolt M20x3000 with spherical plate, Pc-Coat®	1,00	1,12	21,62	84,49
NC bolt M20x4000 with spherical plate, Pc-Coat®	1,00	1,08	21,48	86,26
NC bolt M20x5000 with spherical plate, Pc-Coat®	1,00	1,04	21,15	87,67
NC bolt M20x6000 with spherical plate, Pc-Coat®	1,00	1,02	21,01	88,93

Key environmental indicators (A1-A3) for options for this EPD

Options	Weight (kg)	GWPTotal (kg CO ₂ -eq)	Total energy consumption (MJ)	Amount of recycled materials (%)
NC bolt M20x2400 Pc-Coat®	1,00	1,11	22,12	86,55
NC bolt M20x3000 Pc-Coat®	1,00	1,05	21,47	88,62
NC bolt M20x4000 Pc-Coat®	1,00	1,02	21,29	89,60
NC bolt M20x5000 Pc-Coat®	1,00	0,99	20,92	90,48
NC bolt M20x6000 Pc-Coat®	1,00	0,98	20,83	91,37

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21

Graafland and Iversen, (2022) EPD generator for EPD generator for NPCR 013 Part B for Steel and Aluminum, Background information for EPD generator application and LCA data, LCA.no report number: 08.22

NPCR Part A: Construction products and services. Ver. 2.0. April 2021, EPD-Norge.

NPCR 013 Part B for Steel and Aluminium Construction Products , Ver. 4.0, 06.10.2021, EPD Norway.

 epd-norge Global program operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration: Pretec Norge AS Kampenesmosen 3, 1739 Borgenhaugen, Norway	Phone: (+47) 69 10 24 60 e-mail: post@pretec.no web: www.pretec.no
	Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	Developer of EPD generator LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal