


PE foam ties

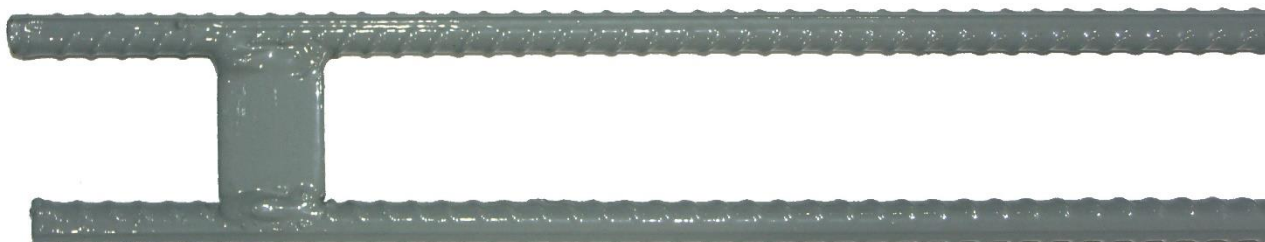

Ties use as struts on the outside of horizontal and vertical joints in PE foam. The ties are secured by front plates.

Stock programme:

Tie Ø10 L=3000

Tie Ø10 L=4000

Tie Ø10 L=5000

Technical information:

Material: B500NC in compliance with NS 3576-3:2012

Rebar: Ø10

Weight: 1.35 kg/m

Aperture in tie: 35x950 mm

Corrosion protection/Pc-Coat

Hot-dip galvanization is carried out in compliance with NS-EN-ISO 1461 and epoxy powder coating in compliance with NS-EN 13438. With regard to coating thickness and further information, please see Document Q/PTC-T19A – Specification for Pc-Coat – SVV/JBV. Please also refer to the Pc-Coat Product Data Sheet and accompanying FDV documentation.

Accessories:

Bolts, washers and nuts.